

★LELI = S02 92-371668/45 ★SU 1672216-A1
 Measurement device for area of flat opaque shapes e.g. of leather or
 fur - uses line of radiators and radiation receivers mounted with
 constant pitch between them above base
 LENGD LIGHT IND CONSTR TECHN BUR 89.01.02
 89SU-4630449


(91.08.23) G01B 21/28

The measurement device includes a transporter positioned on a base
 (3), the surface of which is formed as a mirror. Above the base is a
 line of radiators and radiation receivers which are mounted in
 sequence with a constant pitch between them. A comparison unit
 (11) in the form of an analog comparator has its inverting input
 connected to the output of a commutator switch (10), and its non-
 inverting input - to a reference voltage source, and its output - to the
 input of a pulse area counting unit (12).

To eliminate dependency of measurements on spurious
 triggering, the reference voltage (Uon) is made equal to voltage
 reflected from the mirror plane so that the input voltage UBX is
 always less than or equal to the reference.

USE/ADVANTAGE - Measurement engineering, e.g. in the
 leather and footwear industry. Increased accuracy in measuring
 areas of opaque plane figures by eliminating errors from false
 triggering. Bul. 31/23.8.91 (4pp Dwg.No.2/3)
 N92-283273

S02-A08E

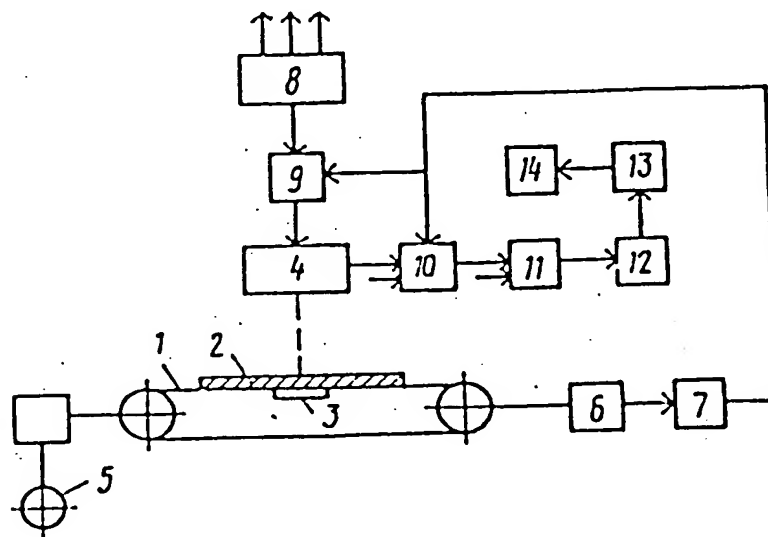

BEST AVAILABLE COPY